


TOSIBOX®

Quickstart Guide v2.3

Copyright © Tosibox Oy 2014

1 TOSIBOX® Key and Lock Serialization

TOSIBOX Lock

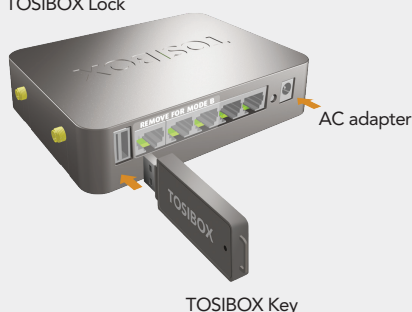


TOSIBOX Key




- Connect the Tosibox AC adapter to the Lock and wait for 2 minutes
- Serialize the Key to the Lock by inserting the Key into the USB port of the Lock. When the LED on the Key stops blinking, the serialization is complete
- Depending on your use case select the Lock mode of operation to Mode A or mode B (See section 2a and 2b)

2a Taking TOSIBOX® Lock Into Use - Mode A

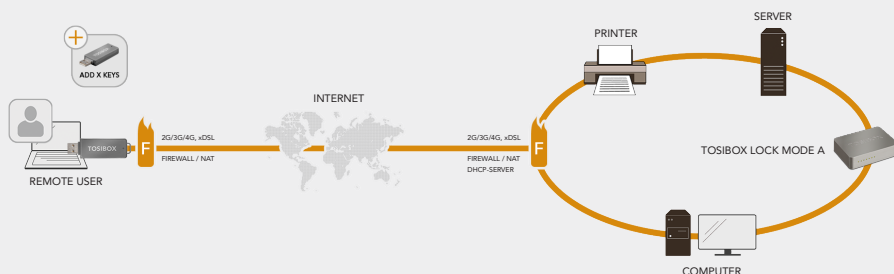

- Connect an ethernet cable from the local network's socket to TOSIBOX Lock's LAN3 -port. The TOSIBOX Lock will find all the devices in the same local network. Note: Access to the devices can be limited with separate MAC-filter functionality, please see User Manual

2b Taking TOSIBOX® Lock Into Use - Mode B

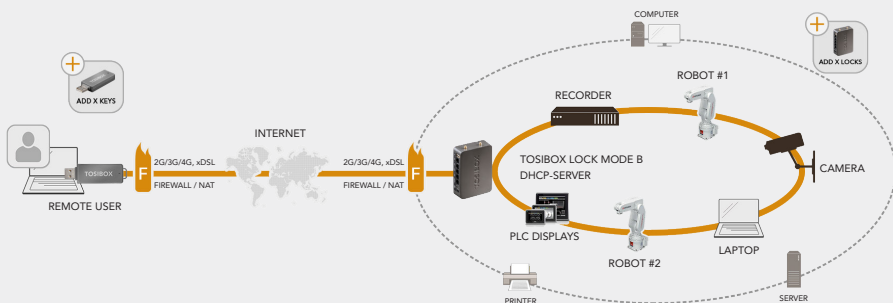

Mode B - Broadband Connection



- Connect the internet to TOSIBOX Lock's WAN port
- Plug in the devices into the LAN ports (LAN 1-3 or WLAN) of the TOSIBOX Lock. If the devices have static IP addresses, please see User Manual "Bringing the Lock into use - Mode B"

Mode B - Mobile Connection




- Put the SIM card into your mobile phone and turn off the PIN code query from the SIM card. Plug the USB modem* into the USB port of the Tosibox Lock. Connect the computer to the Service port of the Lock with an ethernet cable. Open the internet browser and write <http://172.17.17.17> to the address field to access the Lock user interface. Log in using "admin" user ID. The password is visible in the bottom of the Lock. Select "Network" → "3G". Set your operator's APN name
- Plug in the controlled devices into the LAN ports (LAN 1-3 or WLAN) of the TOSIBOX Lock. If the devices have static IP addresses, please see the User Manual "Bringing the Lock into use - Mode B"

*The supported models (08/2013): Huawei E160, E169, E173, E176, E180, E353, E367, E372, E392, E3131, E1552. The HiLink version of any modem is not supported. For more information and latest supported modem models, see: help.tosibox.com

3 Taking TOSIBOX® Key Into Use

Connect TOSIBOX Key to computer and install TOSIBOX Key software

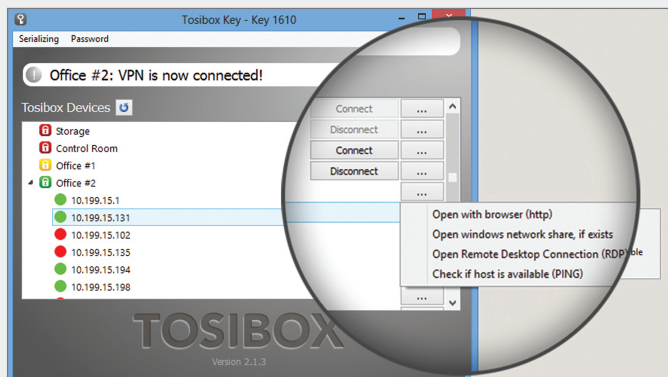

TOSIBOX Key user interface: in left TOSIBOX® Lock devices which are serialized for TOSIBOX Key and network devices connected into them. For more options click "... " button.

- TOSIBOX Lock is connected to internet and TOSIBOX Key has connection to TOSIBOX Lock
- TOSIBOX Lock is connected to internet, but TOSIBOX Key doesn't have connection to TOSIBOX Lock
- TOSIBOX Lock is not connected to internet